

Latches adjustable fastening holes covered

Item description/product images



Description

Material:

Steel or stainless steel 1.4301.

Version:

Steel trivalent blue passivated.

Stainless steel bright.

Note:

Adjustable latches are secure locking systems for industrial applications. By exceeding the dead centre they resist vibration.

After the hook is engaged with the catch plate, the parts to be locked can be drawn together by up to 5 mm by pushing the lever down.

To compensate for tolerances or to create enough tension, the hook length can be adjusted using the M5 threaded spindle.

The latches can be screwed down or riveted.

Any catch plate can be combined with any latch.

Order required catch plate version separately.

The retaining force F1 applies to the latch, not the catch plate.

Accessory:

Catch plate K0046.

Drawing reference:

Form A standard


Form B with safety catch

Form C with padlock bracket

1) Hole arrangements for assembly with catch plate

Latches adjustable fastening holes covered

Drawings

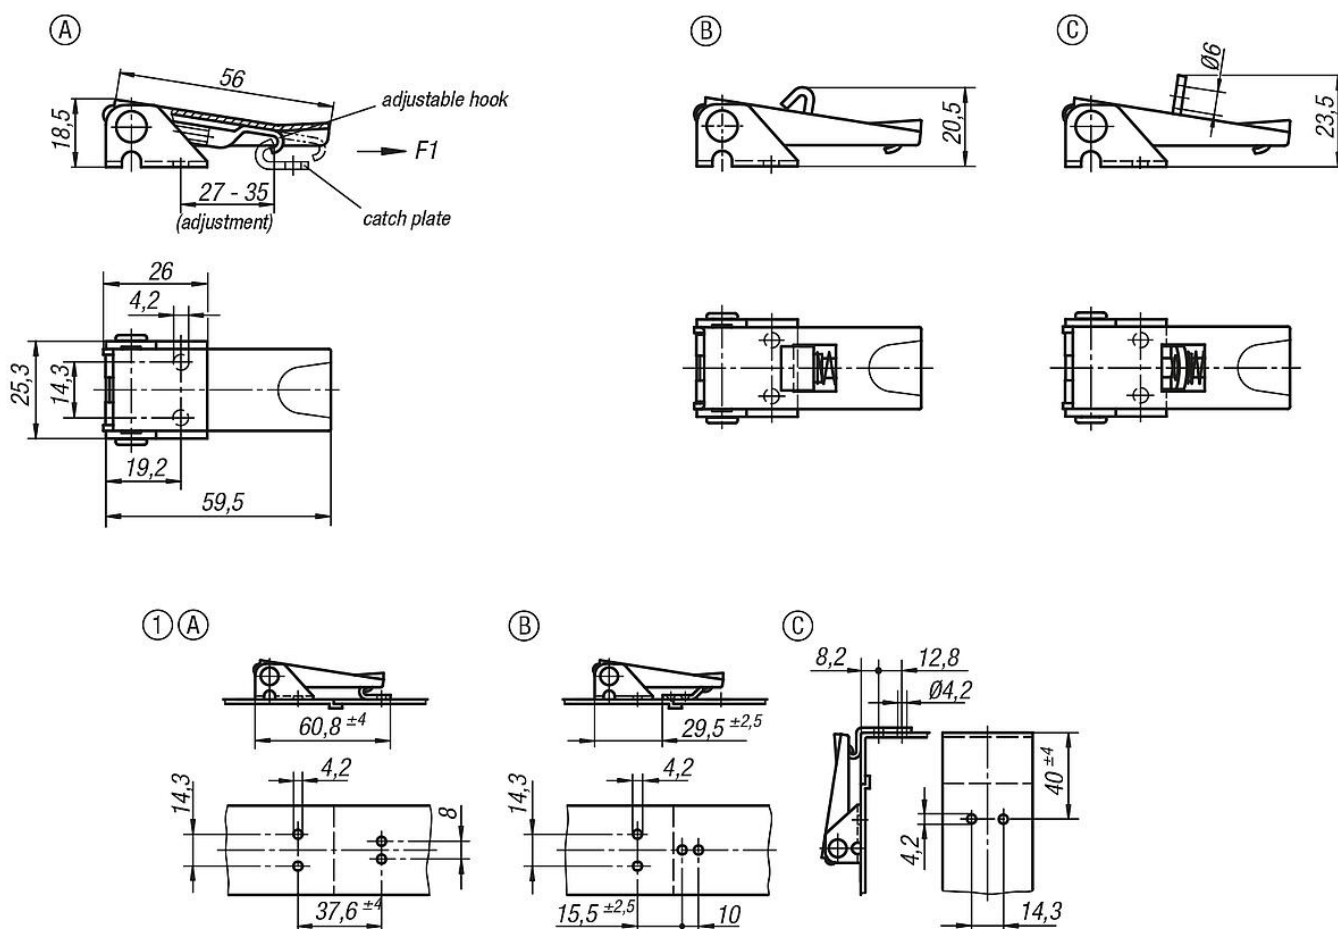

Overview of items

Latches adjustable, fastening holes covered

| Order No. | Main material | Form | Product type | Retaining force F1 N |
|---------------|-----------------|------|-------------------|----------------------|
| K0047.1420601 | steel | A | standard | 1000 |
| K0047.1420602 | stainless steel | A | standard | 1000 |
| K0047.2420601 | steel | B | with lock | 1000 |
| K0047.2420602 | stainless steel | B | with lock | 1000 |
| K0047.3420601 | steel | C | with padlock hole | 1000 |
| K0047.3420602 | stainless steel | C | with padlock hole | 1000 |