

Self-aligning pads, external thread, with O-ring, Form F, flattened ball with diamond grip

Item description/product images



Description

Material:

Body carbon steel.

Ball tool steel.

Version:

Body tempered.

Ball hardened, black oxidised.

Note:

Self-aligning pads are used to support and clamp unmachined and machined workpieces.


They can also be used as stops, supports and thrust pads in fixtures and toolmaking.

Ball secured against rotation.

Advantages:

The built-in O-ring holds the ball in place and keeps dirt and foreign particles out, ensuring uniform movement.

Drawings

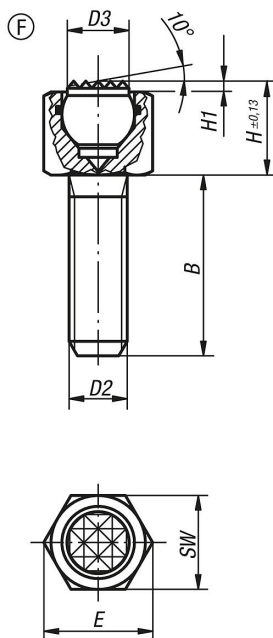

Overview of items

Order No.	Form	B	D2	D3	H	H1	E	SW	Ball-Ø	Load rating max. kN (static load only)
K0288.306X012	F	12	M6	6	9,5	1,5	11,5	10	7	9
K0288.306X025	F	25	M6	6	9,5	1,5	11,5	10	7	9
K0288.306X040	F	40	M6	6	9,5	1,5	11,5	10	7	9

Self-aligning pads, external thread, with O-ring, Form F, flattened ball with diamond grip

Overview of items

Order No.	Form	B	D2	D3	H	H1	E	SW	Ball-Ø	Load rating max. kN (static load only)
K0288.308X012	F	12	M8	8,5	13	1,5	15	13	10	15
K0288.308X025	F	25	M8	8,5	13	1,5	15	13	10	15
K0288.308X040	F	40	M8	8,5	13	1,5	15	13	10	15