

UNILOCK centring clamping bolt size 80 mm

Item description/product images



Description

Material:

Steel.

Version:

Hardened and black oxidised.

Contact faces ground.

Note:

The centring clamping bolts can be used to position basic modules on machine tables.

Centring clamping bolts can be clamped in collet holders. The position of the module is defined via the machine's spindle/control unit.

Can be used in Weldon, Whistle Notch and collet holders.


Repeat accuracy: < 0.021mm


Positioning accuracy: < 0.049mm

Shock absorber function to protect the machine spindle

Cushioning travel: 5.4mm

Caution: Exceeding the cushioning travel of 5.4mm may damage the machine.

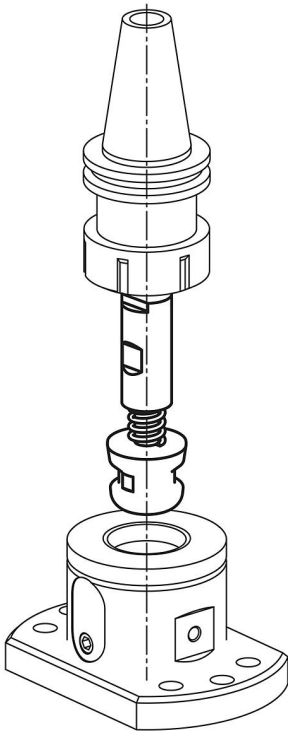

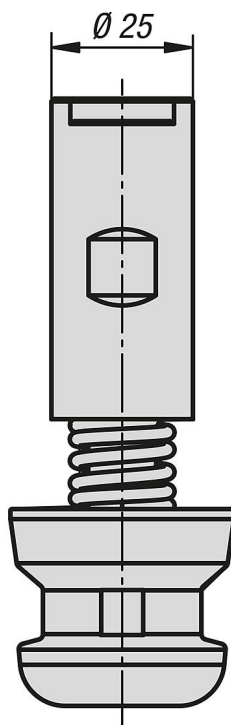UNILOCK centring clamping bolt size 80 mm**Drawings****Overview of items****UNILOCK centring clamping bolt, size 80 mm**

| Order No. | Dimensions |
|------------|-------------|
| K1012.1240 | see drawing |