

Tombstones double-sided without grid holes

Item description/product images



Description

Material:

GJL 300.

Version:

Reference surfaces precision machined.


The clamping surfaces have 0.5 mm allowance.

Note:

The double-sided tombstones are matched to subplates for machine tools acc. to DIN 55201 and JIS 6337-1980.

Ring bolts for lifting are supplied. A cover prevents the cavity of the tombstone filling up with swarf.


Drawings

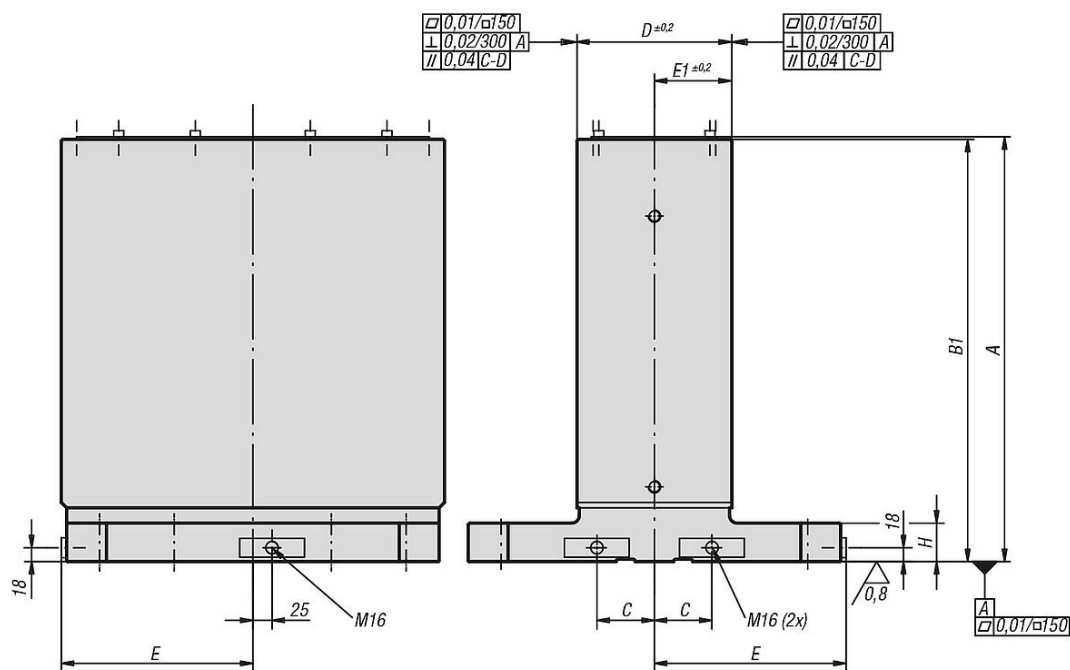


Tombstones double-sided without grid holes

Drawings


K0803.0040151

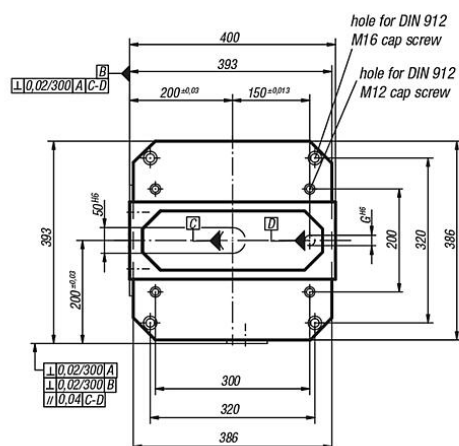


K0803.0050201

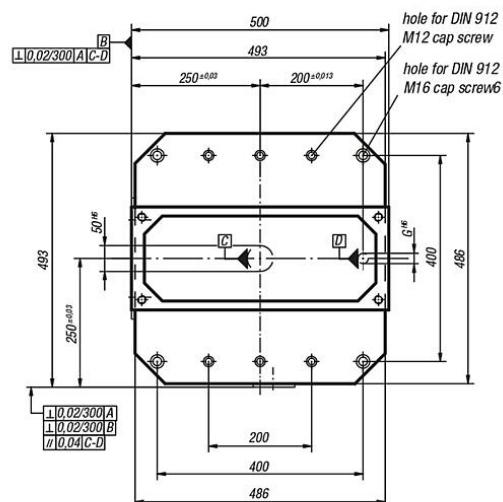

K0803.0063251

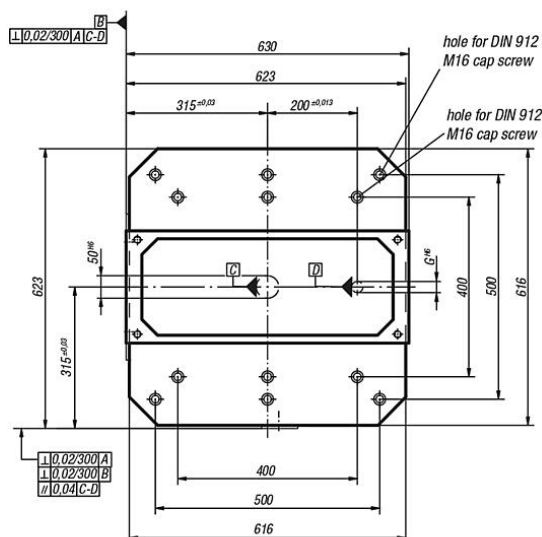

K0803.008030

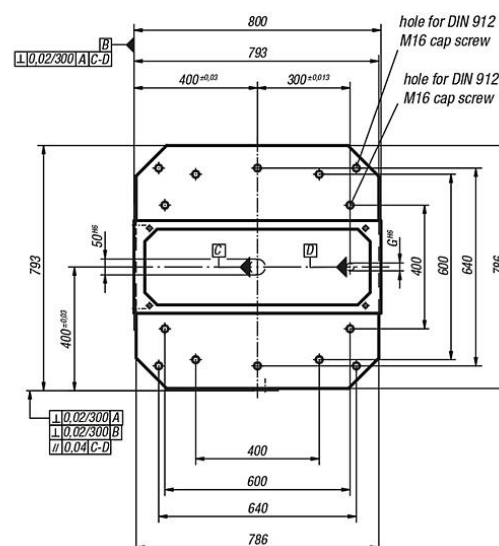

Overview of items