
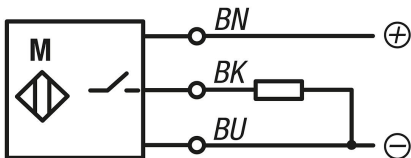
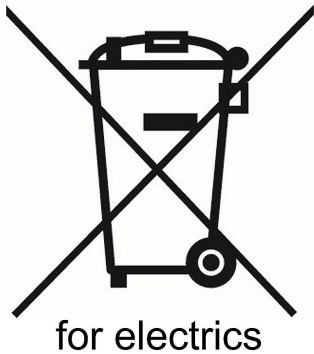
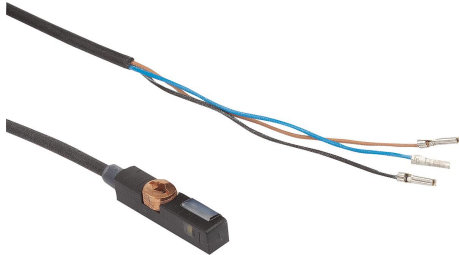


Magnetic field sensor

Item description/product images

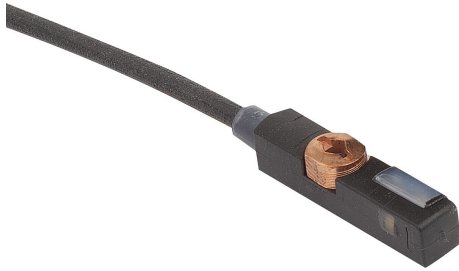

Description

Product description:

Magnetic field sensor for detecting the piston position of a pneumatic cylinder in which a magnet is installed.

Material:

Housing thermoplastic PA12.
Active area PU.
Connection cable PUR.

Version:

Housing black.
Mounted in the T-slot.

Technical data:

Output relay: PNP normally open (NO)
Operating voltage: 10 - 30 V DC
Operating current: 200 mA
Switch field strength: 2 kA/m
Switching frequency: 3000 Hz
Short-circuit proof: yes
Reverse polarity protected: no
Rating: IP67
Connection type: 2 m PUR cable
Approvals: CE, c-UL-us, UKCA, WEEE

Temperature range:

-25 °C to +85 °C

Assembly:

Insert from above into the T-slot and lock with the clamping screw.
SW2, max. tightening torque 0.4 Nm.

Accessory:

Stainless steel pneumatic indexing plungers K2202.
Sensor holder with T-slot K2204.

Drawing reference:

- 1) Active area
- 2) LED
- 3) Lock screw


BN= Brown

BK= Black

BU= Blue

Magnetic field sensor

Drawings

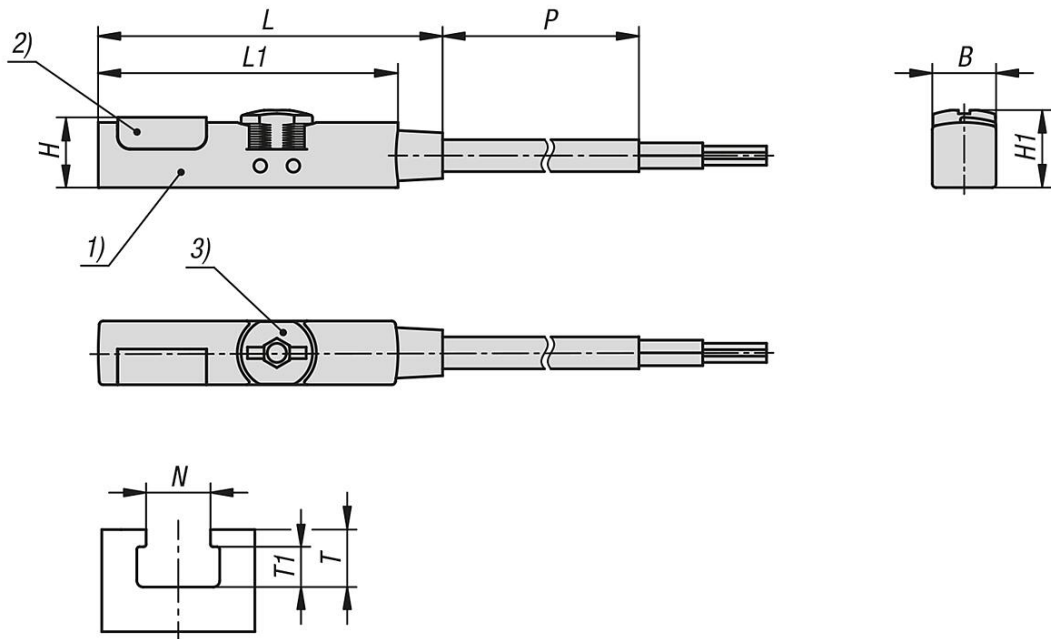

Overview of items

Magnetic field sensor

Order No.	B	D	H	H1	L	L1	P	T = slot depth	T1	N=groove width
K2203.010	5	2,5	5,5	6,1	27	23,5	2000	3,5-6	<4	5-5,4