

Baseplates, grey cast iron with grid holes

Item description/product images



Description

Material:

GJL 300.

Version:

Support and mounting surfaces ground

Note:

Grid spacing 50 ± 0.02 mm.

Baseplates with grid holes are used for constructing modular fixtures. These baseplates are positioned and mounted directly on machine tables.

The two aligning holes are used to align the baseplate on the machine table.

Fastening holes are produced by the customer to suit their machine table.

The alphanumerically labelled grid holes guarantee a defined assignment of clamping elements by repeat setups.

Please order positioning pins to equip the baseplates separately.

Please order protection plugs to plug unused grid holes separately..

Ring bolts for hoisting are supplied.


Other dimensions available on request.

Drawing reference:

1) locating hole

Baseplates, grey cast iron with grid holes

Drawings

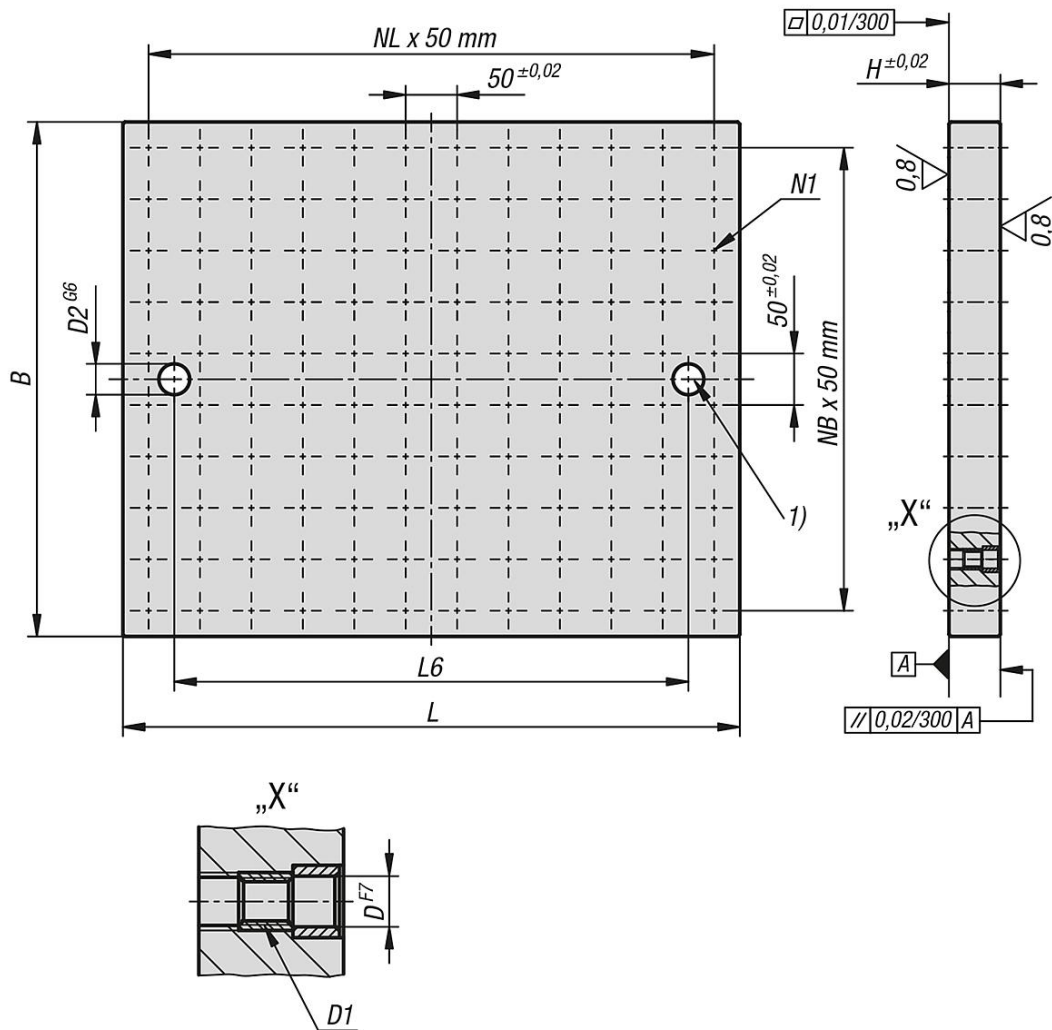

Overview of items

Baseplates, grey cast iron with grid holes

Order No.	L	B	H	L6	D	D1	D2	N1=No. of grid holes	NL=No. lengthwise	NB=No. across
K0800.21240060	600	400	50	500	12	M12	30	96	11	7
K0800.21250060	600	500	50	500	12	M12	30	120	11	9
K0800.21260060	600	600	50	500	12	M12	30	144	11	11
K0800.21240080	800	400	50	700	12	M12	30	128	15	7
K0800.21245090	900	450	50	800	12	M12	30	158	17	8
K0800.21250100	1000	500	50	900	12	M12	30	200	19	9
K0800.21260120	1200	600	50	1100	12	M12	30	288	23	11
K0800.21640060	600	400	50	500	16	M16	30	96	11	7
K0800.21650060	600	500	50	500	16	M16	30	120	11	9
K0800.21660060	600	600	50	500	16	M16	30	144	11	11
K0800.21640080	800	400	50	700	16	M16	30	128	15	7
K0800.21645090	900	450	50	800	16	M16	16	158	17	8
K0800.21650100	1000	500	50	900	16	M16	30	200	19	9
K0800.21660120	1200	600	50	1100	16	M16	30	288	23	11

